


DATA SHEET

Loudspeaker Cable, 2x1.5mm² , LSZH Insulated, CPR Cca class

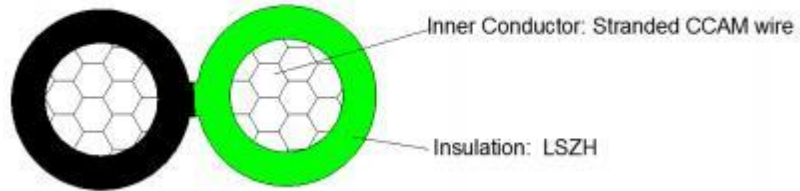

Descriptions	Figure 8 Speaker Cable, Stranded CCAM wire conductor, LSHF insulation, to Cca-s1a,d1,a1 class	
Conductor	Material	Copper Clad Aluminium & Magnesium - CCAM, Stranded
	Construction	30/0.25 ± 0.005mm
	Nom. O.D.	1.58mm
	Section Cross Area	1.5mm ²
Insulation	Material	LSHF
	Nom. O.D.	2.7x5.7 ± 0.2mm
	Nom. Wall Thickness	0.55mm
	Color Codes	Green and black, 2 cores laid parallel, in figure 8 shape
Conductor DCR	34.8 Ω/Km, Max.	
Rated Voltage	220V	
Insulation Resistance	≥25 MOhm*Km	
Test Voltage	2000V	
Temperature Range	-40C to 90C	
Packing Length	100m Coil, 500m Plywood Reel	
Packing Weight	2.3 Kg/100m coil, 12.5 Kg/500m reel	
Copper Weight	0.26 Kg/Km	
AL-MG Alloy Weight	8.35 Kg/Km	