

**Application**

Wall luminaire with single-sided light output, optionally directed downwards or sideways. Luminaire with uniform light distribution for the illumination of walls and advertising spaces as well as for glare-free illumination of floor spaces.

Product description

Luminaire made of aluminium and stainless steel

Matt safety glass

Silicone gasket

Mounting bar with 2 elongated holes

7 mm width, 700 mm spacing

2 cable entries for through-wiring of mains supply cable up to \varnothing 10.5 mm, max. 3×1.5

Connecting terminal and earth conductor terminal 2.5

Lampholder G 5

Electronic ballast (EEI=A2)

220-240 V \sim 0/50-60 Hz

DC 176-254 V

DC Start \geq 198 V

Safety class I

Protection class IP 65

Dust tight and protection against water jets

Impact strength IK07

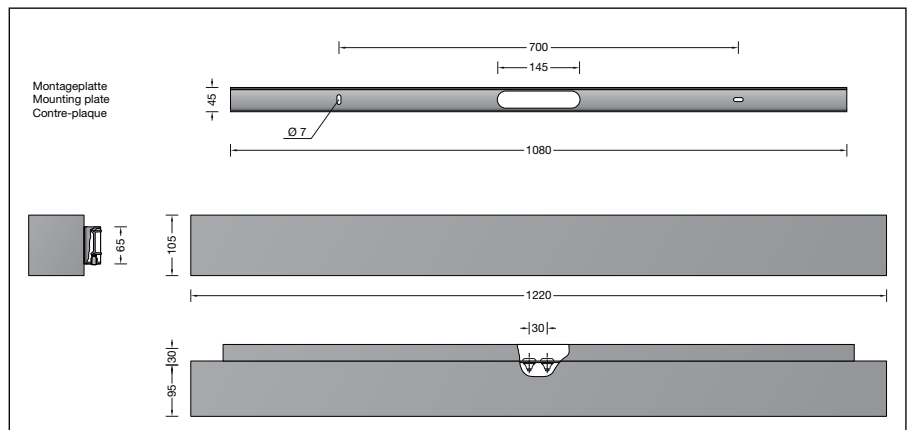
Protection against mechanical

impacts < 2 joule

– Safety mark

CE – Conformity mark

Weight: 8.8 kg

**Lamp**

Fluorescent lamp

T 16 · 28 W · G 5

T 16 · 54 W · G 5

Osram: LUMILUX T5 HE 28 W 2600 lm

Osram: LUMILUX T5 HO 54 W 4450 lm

Philips: Master TL5 HE 28 W 2625 lm

Philips: Master TL5 HO 54 W 4450 lm

Please note the lamp manufacturers' operating instructions.

Article No. 44 408

Colour graphite or silver

graphite – article number

silver – article number + **A**